

1A Current Limited Load Switch

General Description

The JTM4610 SmartSwitch is a current limited P-channel MOSFET power switch designed for high-side load switching applications. This switch operates with inputs ranging from 2.4V to 5.5V, making it ideal for both 3V and 5V systems. An integrated current-limiting circuit protects the input supply against large currents which may cause the supply to fall out of regulation. The JTM4610 is also protected from thermal overload which limits power dissipation and junction temperatures. It can be used to control loads that require up to 1A. Current limit threshold is programmed with a resistor from SET to ground. The quiescent supply current is typically a low 9 μ A. In shutdown mode, the supply current decreases to less than 1 μ A.

The JTM4610 is available in a Pb-free 5-pin SOT23 or 8-pin SC70JW package and is specified over the -40 $^{\circ}$ C to +85 $^{\circ}$ C temperature range.

Notebook Computers

Peripheral Ports

Personal Communication Devices

Features

Input Voltage Range: 2.4V to 5.5V

Programmable Over-Current Threshold

Fast Transient Response:

— 400ns Response to Short Circuit

Low Quiescent Current

— 9 μ A Typical

— 1 μ A Max with Switch Off

145m Ω Typical $R_{DS(ON)}$

Only 2.5V Needed for ON/OFF Control

Under-Voltage Lockout

Thermal Shutdown

4kV ESD Rating


5-Pin SOT23 or 8-Pin SC70JW Package

Temperature Range: -40 $^{\circ}$ C to +85 $^{\circ}$ C

Applications


Hot Swap Supplies

Typical Application

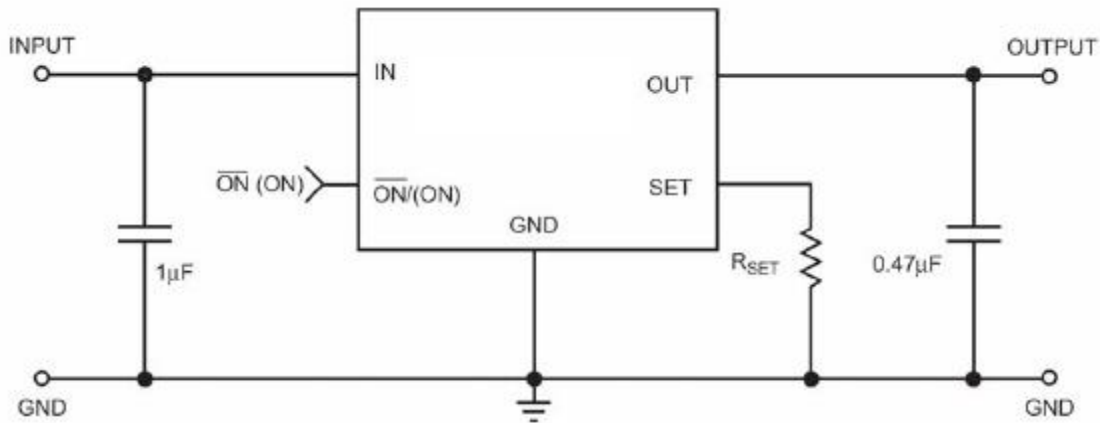

Pin Configuration

SOT23-5
(Top View)

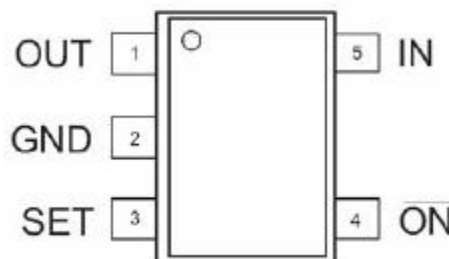

Pin Descriptions

Pin Number	Symbol	Function
1	OUT	P-channel MOSFET drain. Connect a 0.47 μ F capacitor from OUT to GND.
2	GND	Ground connection.
3	SET	Current limit set input. A resistor from SET to ground sets the current limit for the switch.
4	ON	Enable input. Two versions are available, active-high and active-low. See Ordering Information for details.
5	IN	P-channel MOSFET source. Connect a 1 μ F capacitor from IN to GND.

Absolute Maximum Ratings¹

T_A = 25 °C, unless otherwise noted.

Symbol	Description	Value	Units
V _{IN}	IN to GND	-0.3 to 6	V
V _{ON}	ON(<i>ON</i>) to GND	-0.3 to V _{IN} + 0.3	V
V _{SET} , V _{OUT}	SET, OUT to GND	-0.3 to V _{IN} + 0.3	V
I _{MAX}	Maximum Continuous Switch Current	2	A
T _J	Operating Junction Temperature Range	-40 to 150	°C
T _{LEAD}	Maximum Soldering Temperature (at Leads)	300	°C
V _{ESD}	ESD Rating ² - HBM	4000	V

Thermal Characteristics³

Symbol	Description	Value	Units
Θ_{JA}	Thermal Resistance	150	°C/W
P _D	Power Dissipation	667	mW

¹ Stresses above those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation at conditions other than the operating conditions specified is not implied. Only one Absolute Maximum Rating should be applied at any one time.

² Human body model is a 100pF capacitor discharged through a 1.5k Ω resistor into each pin.

³ Mounted on a demo board.

Electrical Characteristics

$V_{IN} = 5V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are $T_A = 25^{\circ}C$.


Symbol	Description	Conditions	Min	Typ	Max	Units
V_{IN}	Operation Voltage		2.4		5.5	V
I_Q	Quiescent Current	$V_{IN} = 5V$, ON (ON) =Active, $I_{OUT} = 0$		9	25	μA
$I_{Q(OFF)}$	Off Supply Current	ON (ON) = Inactive, $V_{IN} = 5.5V$			1	μA
$I_{SD(OFF)}$	Off Switch Current	ON (ON)=Inactive, $V_{IN}=5.5V$, $V_{OUT}=0$		0.01	1	μA
V_{UVLO}	Under-Voltage Lockout	Rising Edge, 1% Hysteresis		1.8	2.4	V
$R_{DS(ON)}$	On Resistance	$V_{IN} = 5.0V$, $T_A = 25^{\circ}C$		145	180	m Ω
		$V_{IN} = 4.5V$, $T_A = 25^{\circ}C$		150		
		$V_{IN} = 3.0V$, $T_A = 25^{\circ}C$		190	230	
TC_{RDS}	On Resistance Temperature Coefficient			2800		ppm/ $^{\circ}C$
I_{LIM}	Current Limit	$R_{SET} = 6.8k\Omega$	0.75	1	1.25	A
$I_{LIM(MIN)}$	Minimum Current Limit			130		mA
$V_{ON(L)}$	ON (ON) Input Low Voltage	$V_{IN} = 2.7V$ to $5.5V$ ¹			0.8	V
$V_{ON(H)}$	ON (ON) Input High Voltage	$V_{IN} = 2.7V$ to $< 4.2V$ ¹	2.0			
		$V_{IN} > 4.2V$ to $5.0V$ ¹	2.4			
$I_{ON(SINK)}$	ON (ON) Input Leakage	$V_{ON} = 5.5V$		0.01	1	μA
T_{RESP}	Current Limit Response Time	$V_{IN} = 5V$		0.4		μs
T_{OFF}	Turn-Off Time	$V_{IN} = 5V$, $R_L = 10\Omega$		4	12	μs
T_{ON}	Turn-On Time	$V_{IN} = 5V$, $R_L = 10\Omega$		12	200	μs
T_{SD}	Over-Temperature Threshold	$V_{IN} = 5V$	T_J Increasing	125		$^{\circ}C$
			T_J Decreasing	115		

1. For V_{IN} outside this range, consult Typical ON (ON) Threshold curve.


Typical Characteristics

Unless otherwise noted, $V_{IN} = 5V$, $T_A = 25^\circ C$.


Quiescent Current vs. Temperature

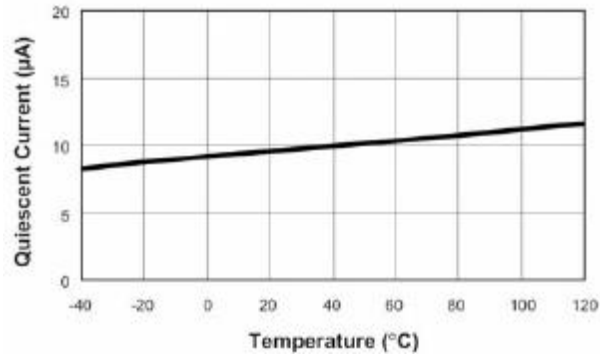


Quiescent Current vs. Input Voltage

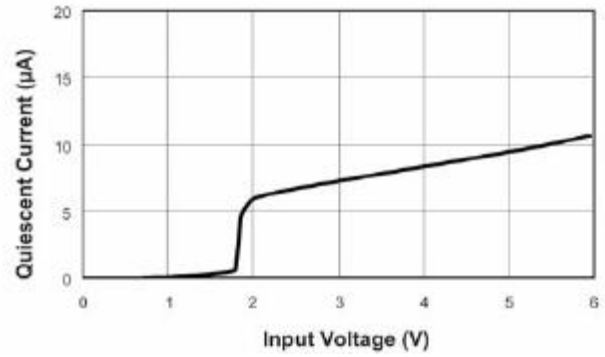


Output Current vs. Output Voltage ($R_{SET} = 16k\Omega$)

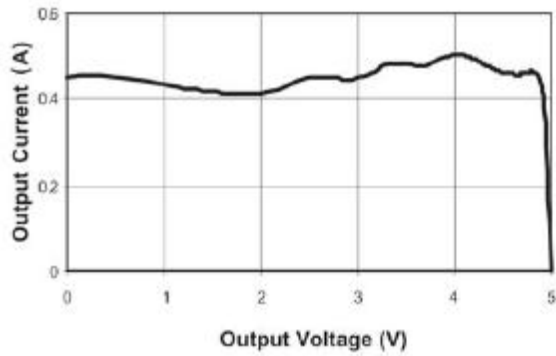


$R_{DS(ON)}$ vs. Temperature

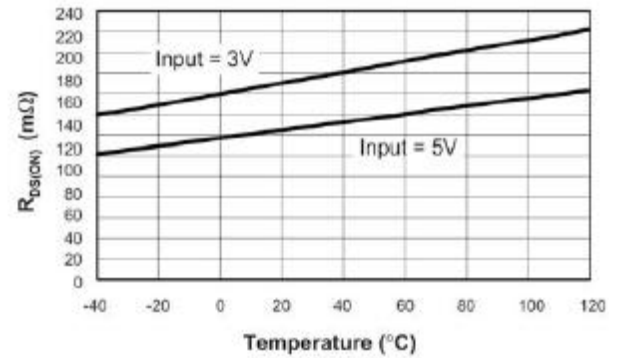


Off-Supply Current vs. Temperature

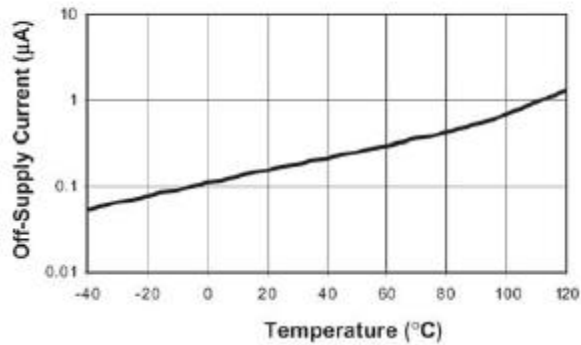


Off-Switch Current vs. Temperature

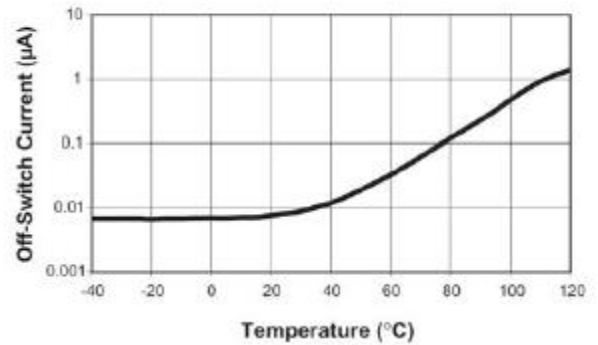


Turn-On vs. Temperature
($R_{LOAD} = 10\Omega$; $C_{LOAD} = 0.47\mu F$)

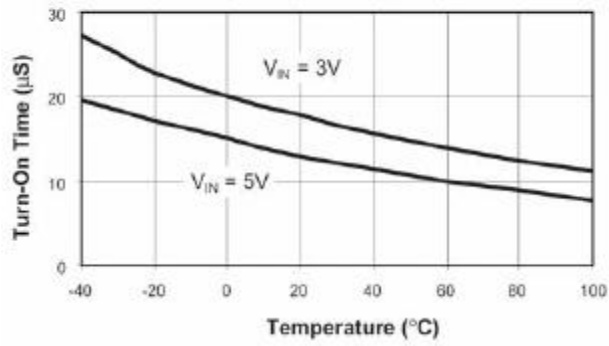


Turn-Off vs. Temperature
($R_{LOAD} = 10\Omega$; $C_{LOAD} = 0.47\mu F$)

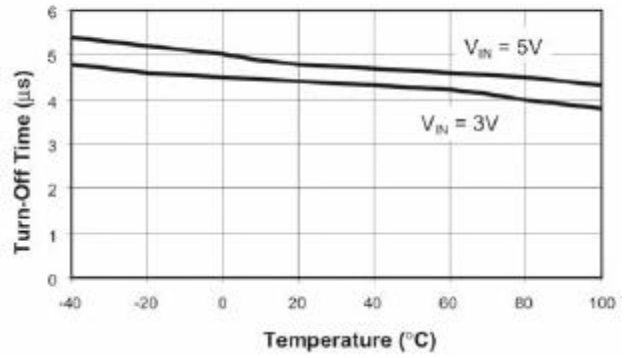


Turn-On
($R_L = 10\Omega$; $C_L = 0.47\mu F$)

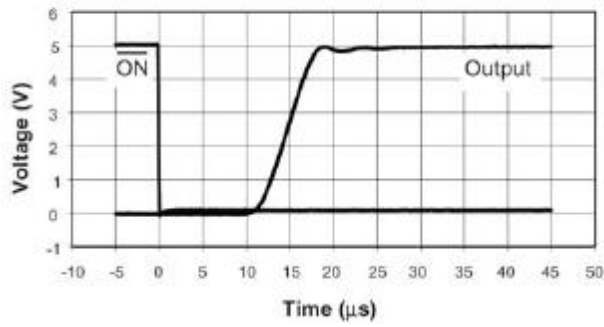


Turn-Off
($R_L = 10\Omega$; $C_L = 0.47\mu F$)



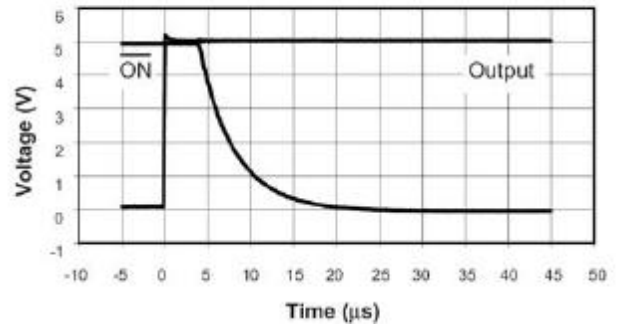


Short-Circuit Through 0.3Ω

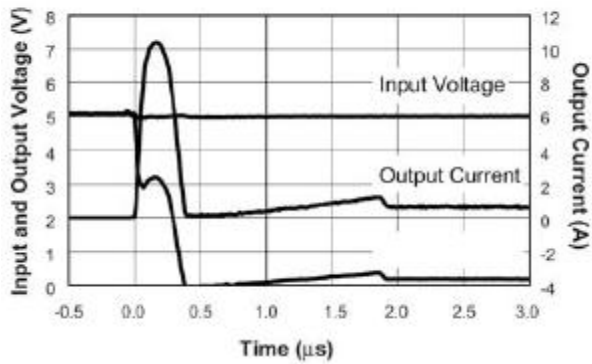


V_{IH} and V_{IL} vs. V_{IN}

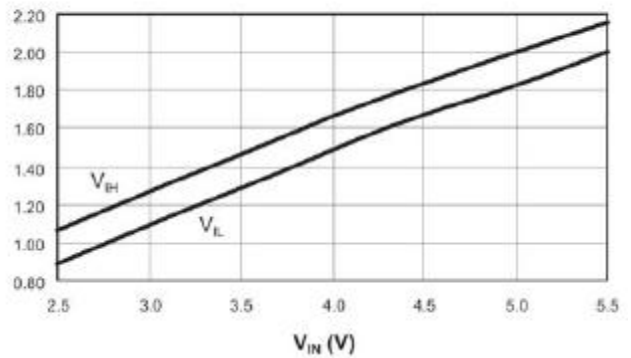

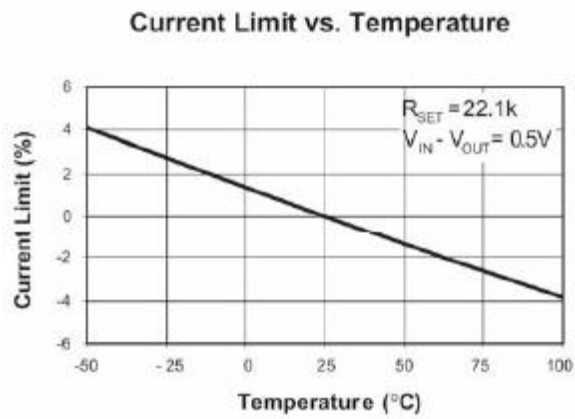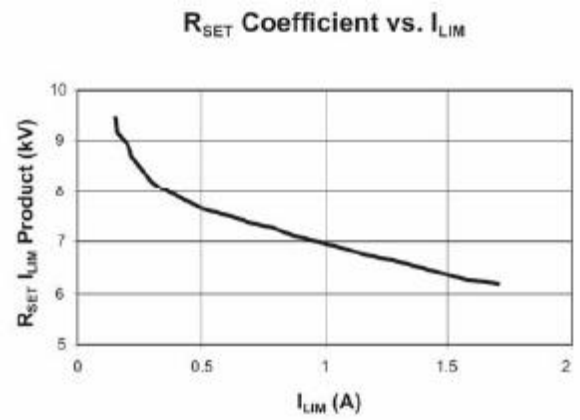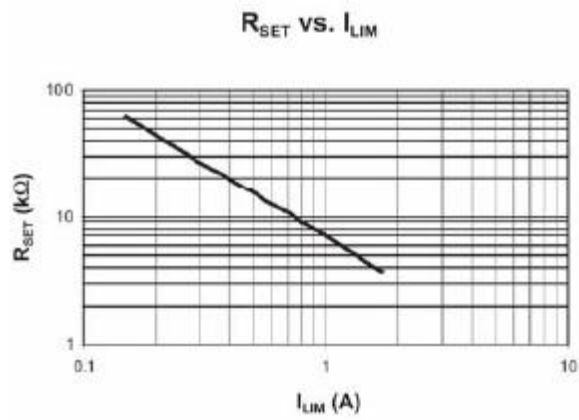

Functional Block Diagram

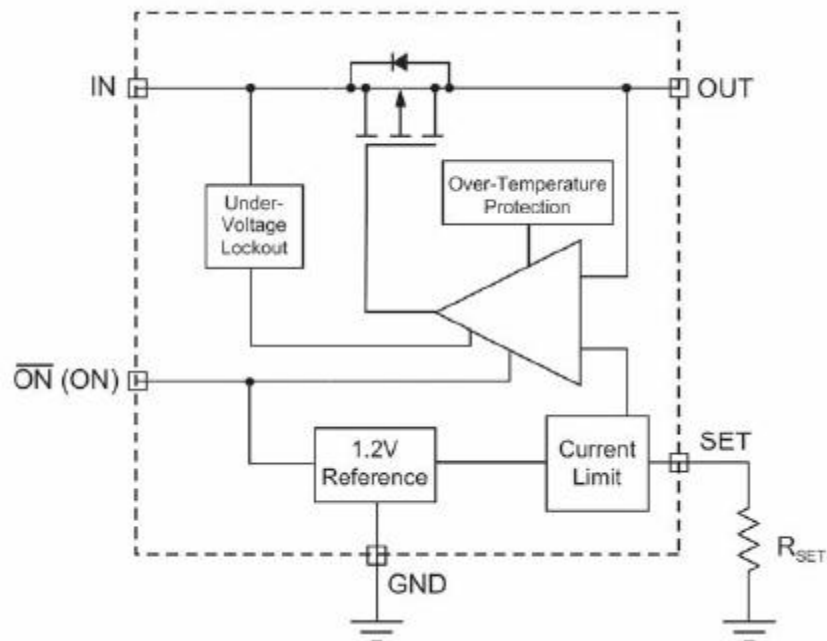

Application Information

Setting Current Limit

In most applications, the variation in I_{LIM} must be taken into account when determining R_{SET} . The I_{LIM} variation is due to processing variations from part to part, as well as variations in the voltages at IN and OUT, plus the operating temperature. See charts "Current Limit vs. Temperature" and "Output Current vs. V_{OUT} ." Together, these three factors add up to a $\pm 25\%$ tolerance (see I_{LIM} specification in Electrical Characteristics section). Figure 1 illustrates a cold device with a statistically higher current limit and a hot device with a statistically lower current limit, both with R_{SET} equal to $10.5k\Omega$. While the chart, " R_{SET} vs. I_{LIM} " indicates an I_{LIM} of $0.7A$ with an R_{SET} of $10.5k\Omega$, this figure shows that the actual current limit will be at least $0.525A$ and no greater than $0.880A$.

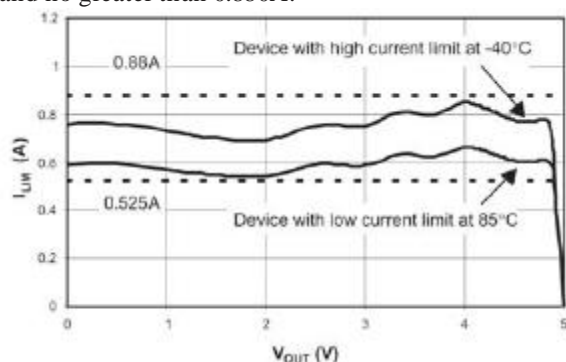


Figure 1: Current Limit Using $10.5k\Omega$.

To determine R_{SET} , start with the maximum current drawn by the load and multiply it by 1.33 (typical $I_{LIM} = \text{minimum } I_{LIM} / 0.75$). This is the typical current limit value. Next, refer to " R_{SET} vs. I_{LIM} " and find the R_{SET} that corresponds to the typical current limit value. Choose the largest resistor available that is less than or equal to it. For greater precision, the value of R_{SET} may also be calculated using the $I_{LIM} R_{SET}$ product found in the chart " R_{SET} Coefficient vs. I_{LIM} ." The maximum current is derived by multiplying the typical current for the chosen R_{SET} in the chart by 1.25. A few standard resistor values are listed in the table "Current Limit R_{SET} Values."

Current Limit R_{SET} Values

R_{SET} ($k\Omega$)	Current Limit Typ (mA)	Device Will Not Current Limit Below (mA)	Device Always Current Limits Below (mA)
40.2	200	150	250
30.9	250	188	313
24.9	300	225	375
22.1	350	263	438
19.6	400	300	500
17.8	450	338	563

16.2	500	375	625
14.7	550	413	688
13.0	600	450	750
10.5	700	525	875
8.87	800	600	1000
7.50	900	675	1125
6.81	1000	750	1250
6.04	1100	825	1375
5.49	1200	900	1500
4.99	1300	975	1625
4.64	1400	1050	1750

Example: A USB port requires $0.5A$. $0.5A$ multiplied by 1.33 is $0.665A$. From the chart named " R_{SET} vs. I_{LIM} ," R_{SET} should be less than $11k\Omega$. $10.5k\Omega$ is a standard value that is a little less than $11k\Omega$ but very close. The chart reads approximately $0.700A$ as a typical I_{LIM} value for $10.5k\Omega$. Multiplying $0.700A$ by 0.75 and 1.25 shows that the JTM4610 will limit the load current to greater than $0.525A$ but less than $0.875A$.

Operation in Current Limit

When a heavy load is applied to the output of the JTM4610, the load current is limited to the value of I_{LIM} determined by R_{SET} . See Figure 2, "Overload Operation." Since the load is demanding more current than I_{LIM} , the voltage at the output drops. This causes the JTM4610 to dissipate a larger than normal quantity of power, and its die temperature to increase. When the die temperature exceeds an over-temperature limit, the JTM4610 will shut down until it has cooled sufficiently, at which point it will startup again. The JTM4610 will continue to cycle on and off until the load is removed, power is removed, or until a logic high level is applied to ON.

Enable Input

In many systems, power planes are controlled by integrated circuits which run at lower voltages than the power plane itself. The enable input ON of the JTM4610 has low and high threshold voltages that accommodate this condition. The threshold voltages are compatible with $5V$ TTL and $2.5V$ to $5V$ CMOS.

Reverse Voltage

The JTM4610 is designed to control current flowing from IN to OUT. If a voltage is applied to OUT which is greater than the voltage on IN, large currents may flow. This could cause damage to the JTM4610.

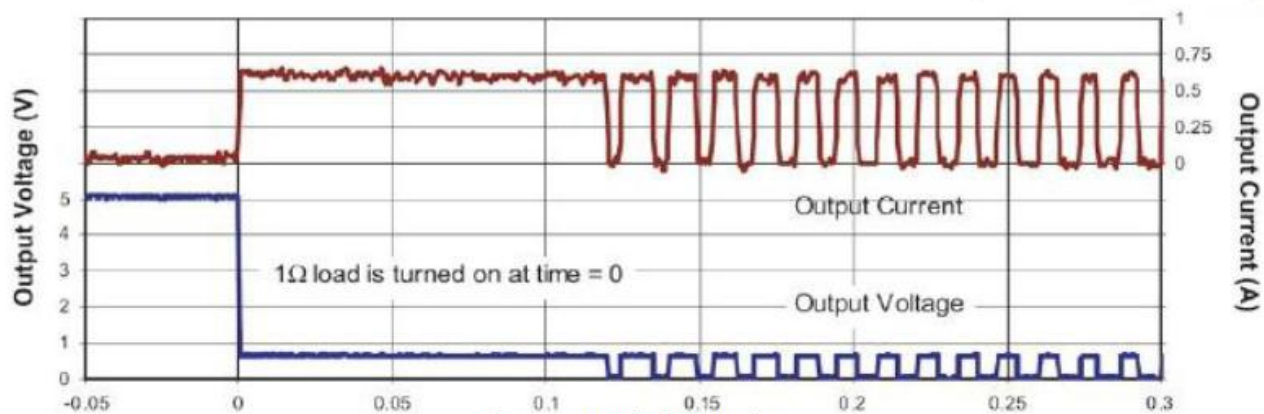


Figure 2: Overload Operation.

Ordering Information

Package	Enable	Marking ¹	Part Number (Tape and Reel) ²
SOT23-5	ON (active low)	ERXYY	HM4610L
SOT23-5	ON (active high)	HXXYY	HM4610H


¹ XXX = assembly and date code.

² Sample stock is generally held on part numbers listed in BOLD.

All products are offered in Pb-free packaging.
The term "Pb-free" means semiconductor products that are in compliance with current RoHS standards, including the

requirement that lead not exceed 0.1% by weight in homogeneous materials. For more information, please contact our sales department.

Package Information

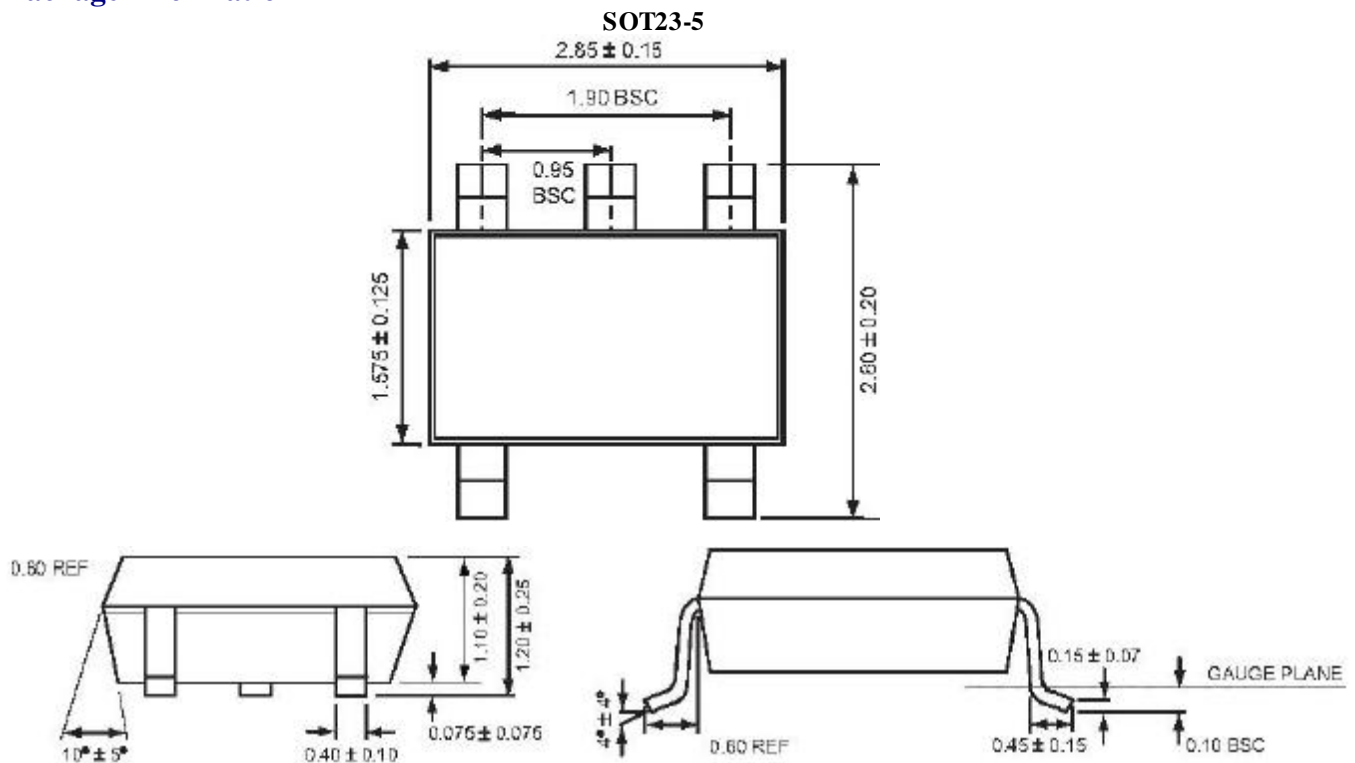

All dimensions in millimeters.