

600mA LOW DROPOUT LINEAR REGULATOR

FEATURES

- Application for Extreme Low Output Voltage
- Guaranteed 600mA Output Current
- Very Low Quiescent Current at about 30uA
- $\pm 2\%$ Output Voltage Accuracy
- Needs Only 1 μ F Capacitor for Stability
- Thermal Shutdown / Current Limited Protection
- Adjusted Mode with 0.8V Reference Voltage
- Low-ESR Ceramic Capacitor for Output Stability
- Tiny SO-8, SOT-23-5L & SC-70-5L Package Type
- Halogen Free Product
- High PSRR

DESCRIPTION

The JTMA8866 series are low dropout, positive linear regulators with very low quiescent current. The JTMA8866 can supply 600mA output current with a low dropout voltage & very low output voltage.

The JTMA8866 regulator is able to operate with output capacitors as small as 1 μ F for stability. Other than the current limit protection JTMA8866 also offers on chip thermal shutdown feature providing protection against overload or any condition when the ambient temperature exceeds the junction temperature.

The JTMA8866 series are available in low-profile, space-saving SO-8, SOT-23-5L & SC-70-5L packages.

APPLICATIONS

- DVD/CD-ROMs, CD/RWs
- Wireless Devices
- LCD Modules
- Battery Power Systems
- Card Readers
- XDSL Routers

TYPICAL APPLICATION

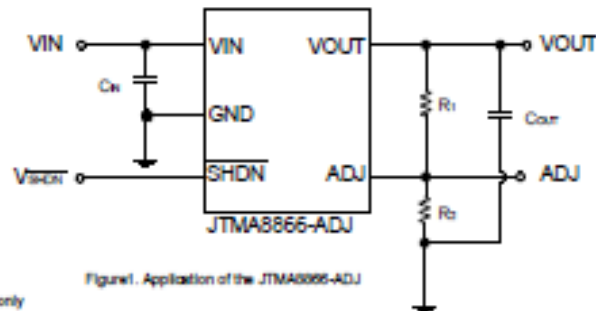


Figure1. Application of the JTMA8866-ADJ




Note : R_i, R_o for adjusted mode only

Note : To prevent oscillation, it is recommended to use minimum 1uF X7R or X5R dielectric capacitors if ceramics are used as input / output capacitors.

ORDERING / PACKAGE INFORMATION

JTMA8866X

Package Type
Y5 : SOT-23-5L
U5 : SC-70-5L
W : SO-8

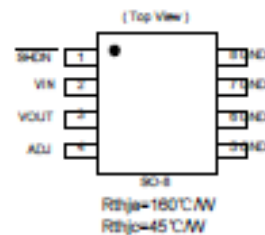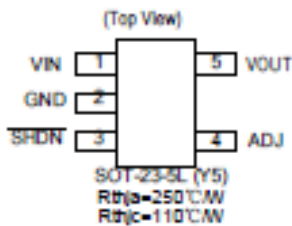

Data and specifications subject to change without notice

1

201301046

有需要详细的文件请发邮件: oumao18@itm-ic.com 联系或电话: 0755-262580208