

250mA CMOS Low Dropout Voltage Low consumption Regulator

Features:

- Low Power Consumption: 3.0uA (Typ.)
- Maximum Output Current: 250mA
- Small Dropout Voltage:
170mV@100mA (Vout=3.0V)
400mV@250mA (Vout=3.0V)
- Input Voltage Range: 1.5V~10V
- Output Voltage Range: 1.2V~6.0V
(customized on command in 0.1V steps)
- Highly Accurate: $\pm 2\%$ ($\pm 1\%$ customized)
- Output Current Limit

Applications:

- Battery Powered equipment
- Power Management of MP3、PDA、DSC、Mouse、PS2 Games
- Reference Voltage Source
- Regulation after Switching Power

Outline:

JTMB8503 series is a group of positive voltage output, low power consumption, low dropout voltage, three terminal regulator. It can provide 250mA output current when input / output voltage differential drops to 400mV (Vin =4.0V、Vout=3.0V)。The very low power consumption of JTMB8503 (Iq=3.0uA) can greatly improve natural life of batteries.


JTMB8503 can provide output value in the range of 1.2V~6.0V in 0.1V steps. It also can customized on command.

JTMB8503 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

JTMB8503 has well load transient response and good temperature characteristic, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

JTMB8503 is available in SOT-89-3、SOT-23-3,TO-92 packages which is lead free, it also can available in these packages with lead.

JTMB8503 Typical Application Circuit

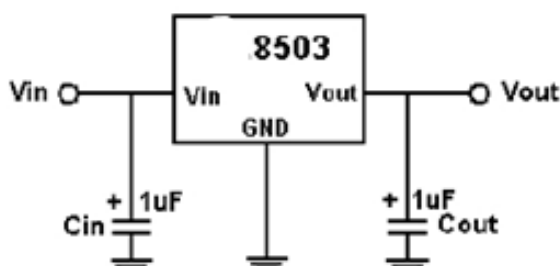


Application hints:

NOTE1: Input capacitor (Cin=1uF) is recommended in all application circuit. Tantalum capacitor is recommended.


NOTE2: Output capacitor (Cout=1uF) is recommended in all application to assure the stability of circuit. Tantalum capacitor is recommended.

JTMB8503 Typical Performance Characteristic:




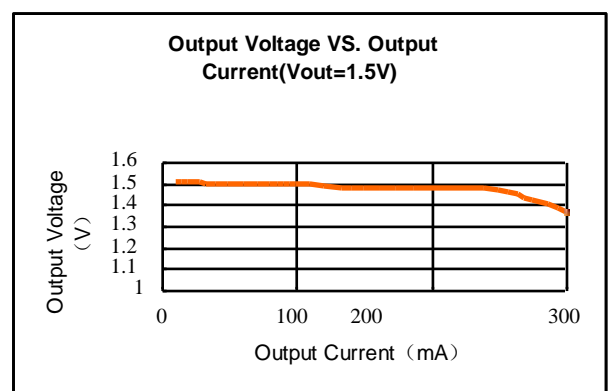



Selection Guide:

JTMB8503-XX XX XX

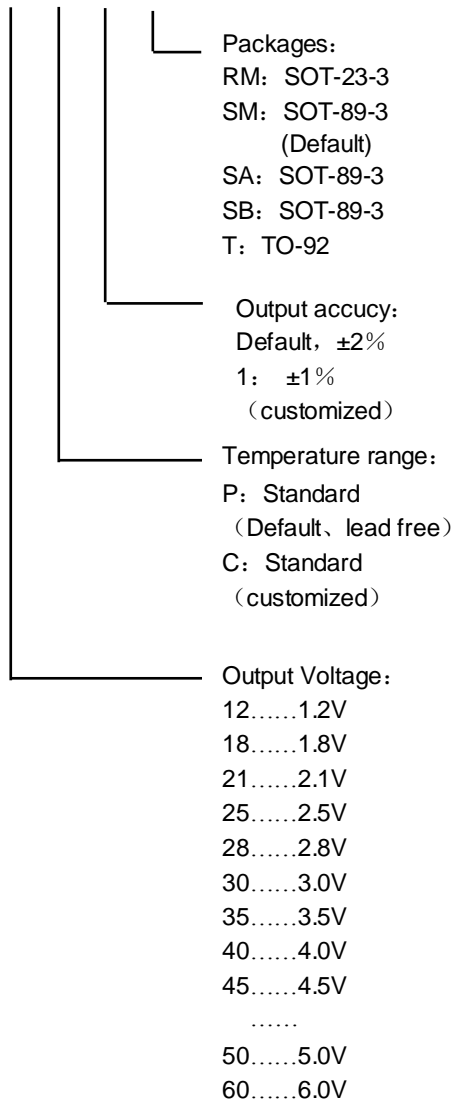







Pin Assignment:

Product Classification	Pin Configuration
JTMB8503-□□□PRM	SOT-23-3  <p>1 Vss 2 Vout 3 Vin</p>
JTMB8503-□□□PSM	SOT-89-3  <p>1 Vss 2 Vin 3 Vout</p>
JTMB8503-□□□PSA	SOT-89-3  <p>1 Vss 2 Vout 3 Vin</p>
JTMB8503-□□□PSB	SOT-89-3  <p>1 Vout 2 Vss 3 Vin</p>
JTMB8503-□□□PT	TO-92  <p>1 Vss 2 Vin 3 Vout</p>


Pin Description:

Pin number					PIN Name	Function
SOT-23-3	SOT-89-3 (SM)	SOT-89-3 (SA)	SOT-89-3 (SB)	TO-92		
1	1	1	2	1	Vss	Ground
3	2	3	3	2	Vin	Supply voltage input
2	3	2	1	3	Vout	Output Voltage

Product Classification:

Product Name	Output Voltage	Package Type	Package Marking
JTMB8503-12PR	1.2V	SOT-23-3	 1 Output voltage
JTMB8503-15PR	1.5V	SOT-23-3	
JTMB8503-21PR	2.1V	SOT-23-3	
JTMB8503-25PR	2.5V	SOT-23-3	
JTMB8503-30PR	3.0V	SOT-23-3	
-----	-----	SOT-23-3	
JTMB8503-50PR	5.0V	SOT-23-3	 1 Output voltage 2 Lot No.
JTMB8503-12PS	1.2V	SOT-89-3	
JTMB8503-15PS	1.5V	SOT-89-3	
JTMB8503-21PS	2.1V	SOT-89-3	
JTMB8503-25PS	2.5V	SOT-89-3	
JTMB8503-30PS	3.0V	SOT-89-3	
-----	-----	SOT-89-3	 1 Output voltage 2 Lot No.
JTMB8503-50PS	5.0V	SOT-89-3	
JTMB8503-12PS	1.2V	SOT-89-3	
JTMB8503-15PS	1.5V	SOT-89-3	
JTMB8503-21PS	2.1V	SOT-89-3	
JTMB8503-25PS	2.5V	SOT-89-3	
JTMB8503-30PS	3.0V	SOT-89-3	 1 Output voltage 2 Lot No.
-----	-----	SOT-89-3	
JTMB8503-50PS	5.0V	SOT-89-3	
JTMB8503-12PS	1.2V	SOT-89-3	
JTMB8503-15PS	1.5V	SOT-89-3	
JTMB8503-21PS	2.1V	SOT-89-3	
JTMB8503-25PS	2.5V	SOT-89-3	 1 Output voltage 2 Lot No.
JTMB8503-30PS	3.0V	SOT-89-3	
-----	-----	SOT-89-3	
JTMB8503-50PS	5.0V	SOT-89-3	
JTMB8503-12PT	1.2V	TO-92	
JTMB8503-15PT	1.5V	TO-92	
JTMB8503-21PT	2.1V	TO-92	
JTMB8503-25PT	2.5V	TO-92	
JTMB8503-30PT	3.0V	TO-92	 1 Output voltage 2 Lot No.
-----	-----	TO-92	
JTMB8503-50PT	5.0V	TO-92	

Block Diagram:

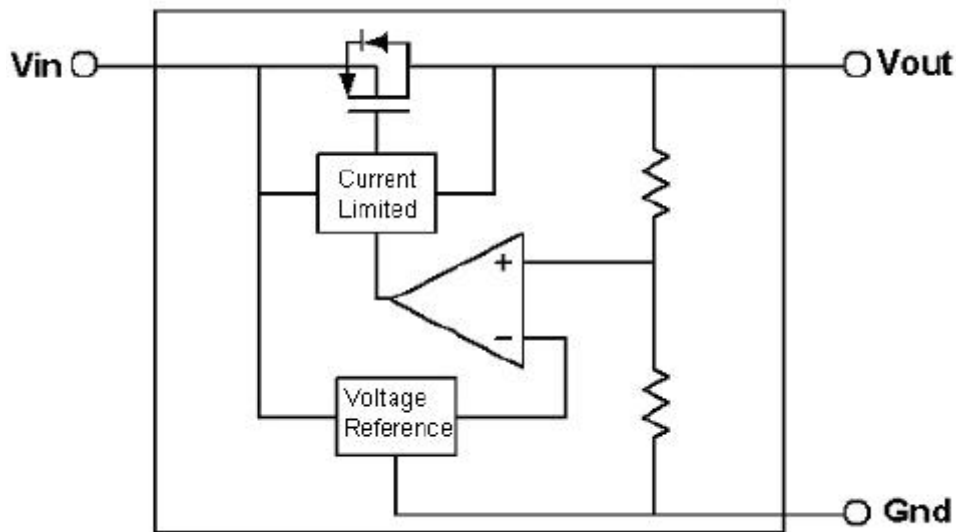

Absolute Maximum Ratings:

Max input voltage -----	10V
Junction Temperature (T _J) -----	125°C
Ambient Temperature(T _A) -----	-40°C~85°C
Power Dissipation	
SOT-23-3-----	0.15W
SOT-23-5-----	0.25W
SOT-89-3-----	0.5W
Storage Temperature(T _s) -----	-45°C~150°C
Lead Temperature and Time -----	260°C,10S

Recommended Work Conditions:

Item	Min	Recommended	Max	unit
Input Voltage Range			8	V
Ambient Temperature	-40		+125	°C

Electrical Characteristics:

(Test Conditions: C_{in}=1uF,C_{out}=1uF,T_A=25°C, unless otherwise specified.)

JTMB8503-1.5V

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{in}	Input Voltage				8	V
V _{out}	Output Voltage		1.47	1.5	1.53	V
I _{out} (Max.)	Maximum Output Current	V _{in} =2.5V,V _{out} >1.47	250			mA
Dropout Voltage	Input-Output Voltage Differential	I _{out} =100mA		270	400	mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	I _{out} =40mA 1.6V≤V _{in} ≤8V		0.2	0.3	%/V
ΔV _{out}	Load Regulation	V _{in} =2.5V 1mA≤I _{out} ≤100mA		20	40	mV
I _q	Quiescent Current	V _{in} =2.5V		3.0	5.0	uA

$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	$I_{out}=10mA$		50		ppm/°C
---	--	----------------	--	----	--	--------

JTMB8503-1.8V

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage				8	V
V_{out}	Output Voltage		1.764	1.8	1.836	V
$I_{out(Max.)}$	Maximum Output Current	$V_{in}=2.8V, V_{out}>1.764$	250			mA
Dropout Voltage	Input-Output Voltage Differential	$I_{out}=100mA$		270	400	mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	$I_{out}=40mA$ $2V \leq V_{in} \leq 8V$		0.2	0.3	%/V
ΔV_{out}	Load Regulation	$V_{in}=2.8V$ $1mA \leq I_{out} \leq 100mA$		20	40	mV
I_q	Quiescent Current	$V_{in}=2.8V$		3.0	5.0	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	$I_{out}=10mA$		50		ppm/°C

JTMB8503-2.8V

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage				8	V
V_{out}	Output Voltage		2.744	2.8	2.856	V
$I_{out(Max.)}$	Maximum Output Current	$V_{in}=4V, V_{out}>2.744V$	250			mA
Dropout Voltage	Input-Output Voltage Differential	$I_{out}=100mA$		170	300	mV
		$I_{out}=200mA$		320	500	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	$I_{out}=40mA$ $3V \leq V_{in} \leq 8V$		0.2	0.3	%/V
ΔV_{out}	Load Regulation	$V_{in}=3.8V$ $1mA \leq I_{out} \leq 100mA$		20	40	mV
I_q	Quiescent Current	$V_{in}=3.8V$		3.0	5.0	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	$I_{out}=10mA$		50		ppm/°C

JTMB8503-3.0V


Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage				8	V
V_{out}	Output Voltage		2.94	3.0	3.06	V
$I_{out(Max.)}$	Maximum Output Current	$V_{in}=4V, V_{out}>2.94V$	250			mA
Dropout Voltage	Input-Output Voltage Differential	$I_{out}=100mA$		170	300	mV
		$I_{out}=200mA$		320	500	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	$I_{out}=40mA$ $3.2V \leq V_{in} \leq 8V$		0.2	0.3	%/V

ΔV_{out}	Load Regulation	$V_{in}=4.0V$ $1mA \leq I_{out} \leq 100mA$		20	40	mV
I_q	Quiescent Current	$V_{in}=4V$		3.0	5.0	μA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	$I_{out}=10mA$		50		ppm/ $^{\circ}C$

JTMB8503-5.0V

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage				8	V
V_{out}	Output Voltage		4.9	5.0	5.1	V
$I_{out}(Max.)$	Maximum Output Current	$V_{in}=6V, V_{out}>4.9V$	250			mA
Dropout Voltage	Input-Output Voltage Differential	$I_{out}=100mA$		170	300	mV
		$I_{out}=200mA$		320	500	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	$I_{out}=40mA$ $5.2V \leq V_{in} \leq 8V$		0.2	0.3	%/V
ΔV_{out}	Load Regulation	$V_{in}=6.0V$ $1mA \leq I_{out} \leq 100mA$		20	40	mV
I_q	Quiescent Current	$V_{in}=6V$		3.0	5.0	μA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	$I_{out}=10mA$		50		ppm/ $^{\circ}C$

Typical Application Circuit:

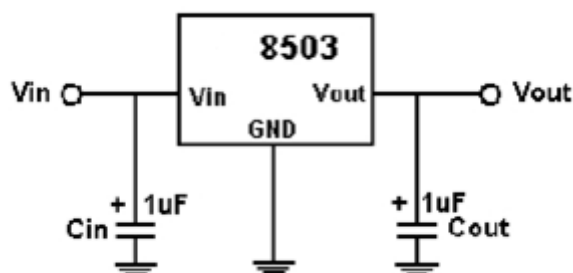

Application hints:

- NOTE1 : Input capacitor ($C_{in}=1\mu F$) is recommended in all application circuit. Tantalum capacitor is recommended.
- NOTE2 : Output capacitor ($C_{out}=1\mu F$) is recommended in all application to assure the stability of circuit. Tantalum capacitor is recommended.

Explanation:



JTMB8503 is a series of low dropout voltage and low power consumption three pins regulator. Its application circuit is very simple, which only needs two outside capacitors. It is composed of these modules: high accuracy voltage reference, current limit circuit, error amplifier, output driver and power transistor.

Current Limit module can keep chip and power system away from danger when load current is more than 250mA.



JTMB8503 uses trimming technique to assure the accuracy of output value within $\pm 2\%$, at the same time, temperature compensated is elaborately considered in this chip, which makes JTMB8503's temperature coefficient within 50ppm/ $^{\circ}C$.

Typical Performance Characteristics:



1. Load regulation

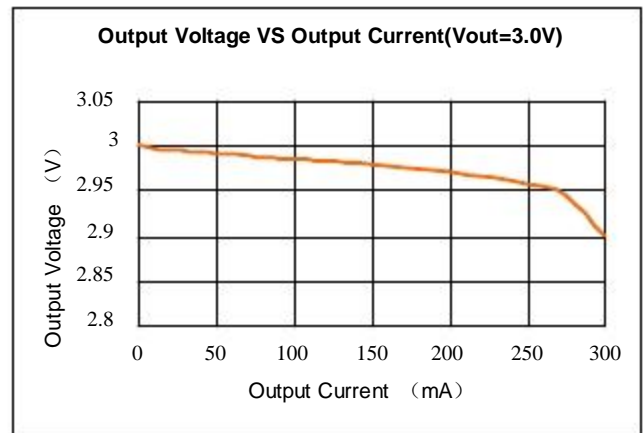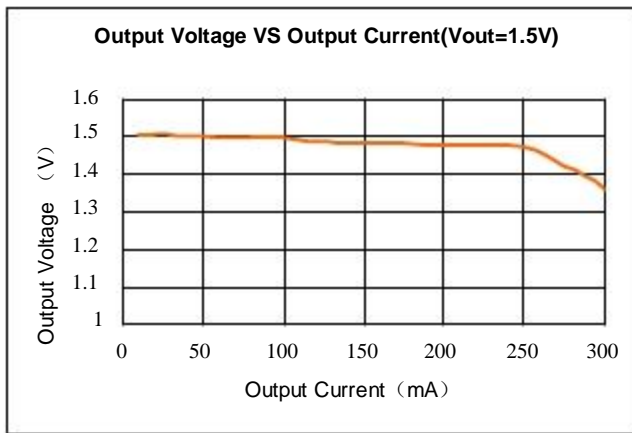


2. Line Regulation

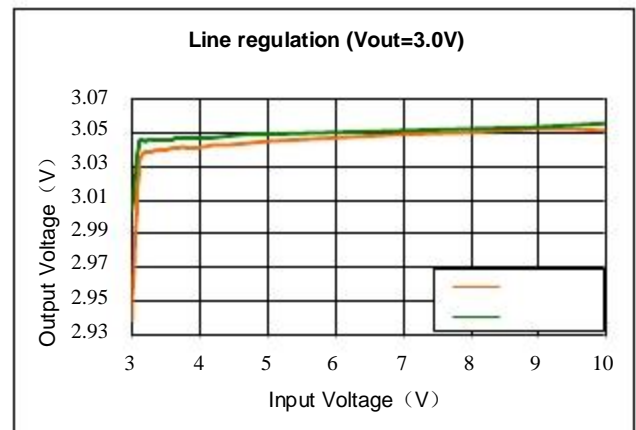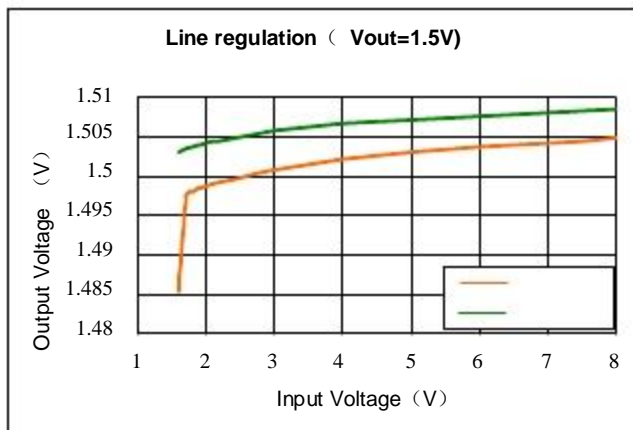


3. Dropout Voltage

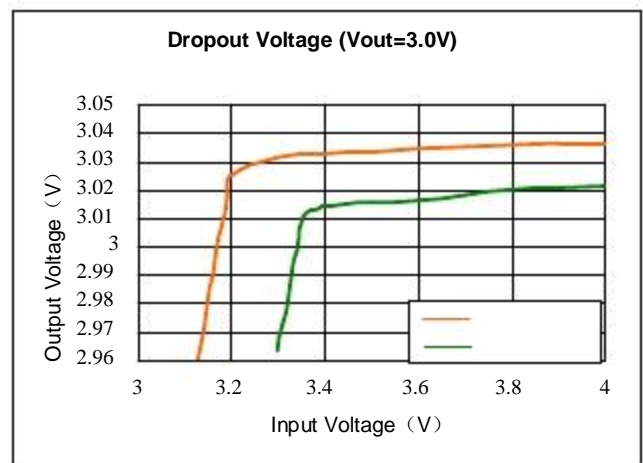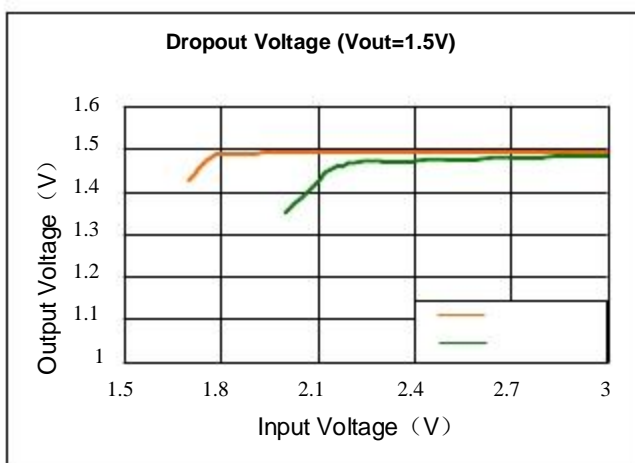


4. Input Voltage transient response ($V_{out}=1.5V, I_{out}=10mA$)

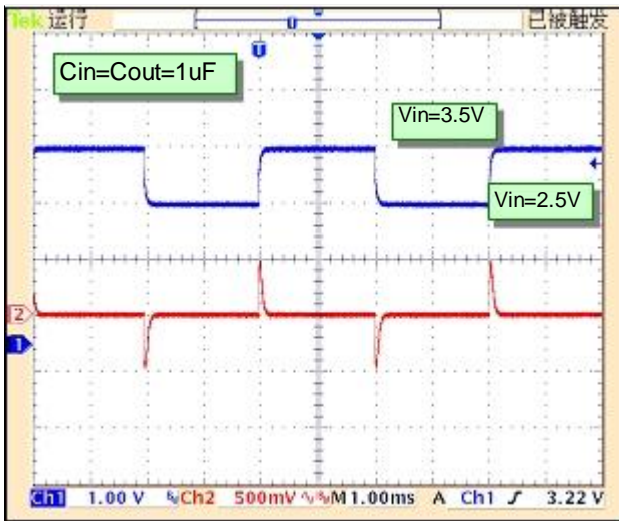


Input Voltage transient response ($V_{out}=1.5V, I_{out}=1mA$)

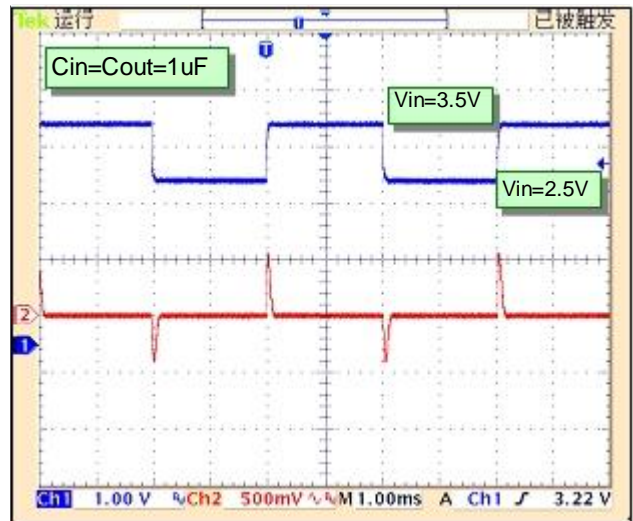


Input Voltage transient response ($V_{out}=3.0V, I_{out}=10mA$)

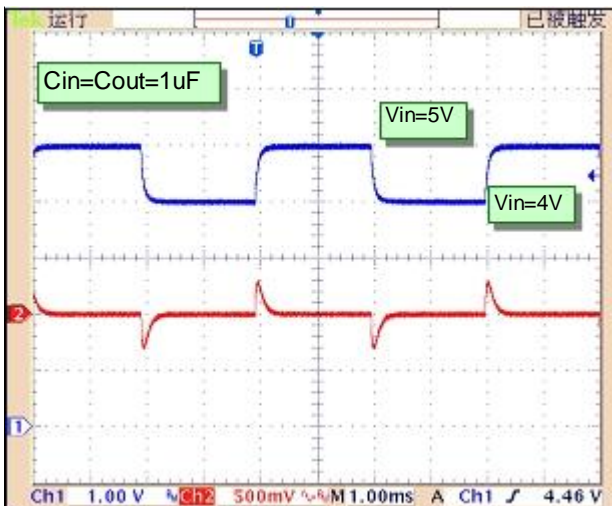


Input Voltage transient response ($V_{out}=3.0V, I_{out}=1mA$)

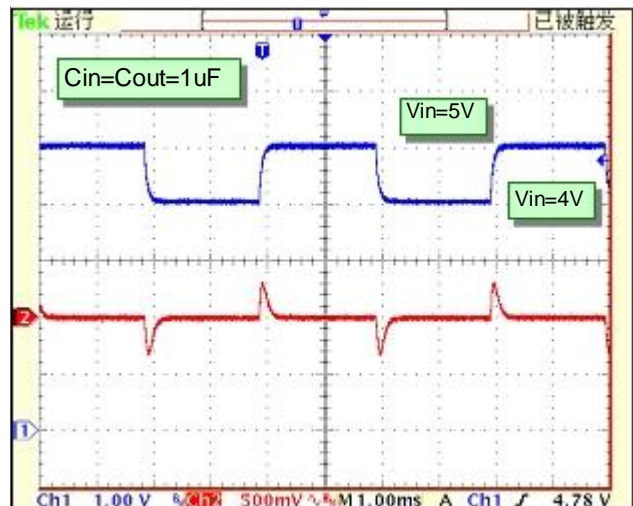

5. Load transient response ($V_{out}=1.5V$)

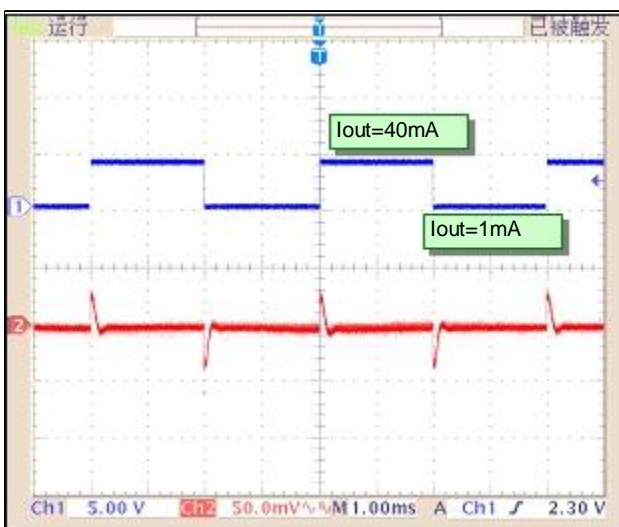


Load transient response ($V_{out}=3.0V$)

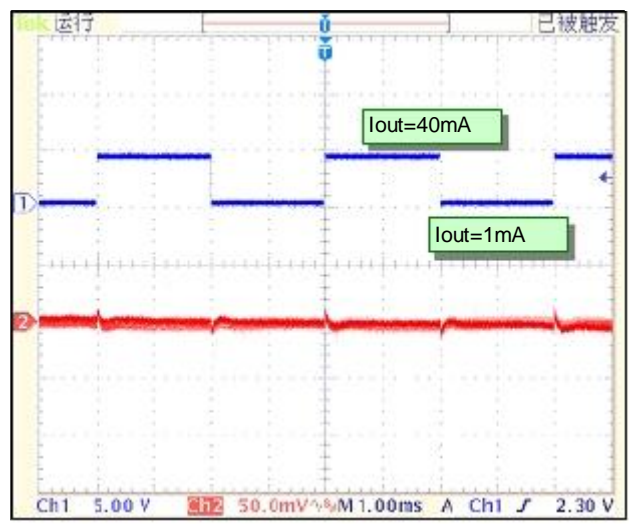

Package Outline:

Package	SOT-89-3	Devices per reel	1000	Unit	mm
<p>Package Dimension:</p> <p>The package dimension drawings include: - Top view: Overall width 4.5 ± 0.1 mm, lead spacing 1.6 ± 0.2 mm, lead height 0.4 mm, body height 2.5 ± 0.1 mm, maximum body height 4.25 MAX. mm, and lead height 0.8 MIN. mm. A central hole has a diameter of $\varnothing 1.0$ mm. - Side view: Lead width 1.5 ± 0.1 mm, lead thickness 0.4 ± 0.1 mm, and body thickness 0.4 ± 0.1 mm. - Bottom view: Lead width 0.42 ± 0.2 mm, lead spacing 1.5 ± 0.1 mm, and lead thickness 0.47 ± 0.1 mm.</p>					
<p>Taping Specification: (M1: Standard Type, M2: Customized)</p> <p>The taping specification drawings include: - M1 (Standard Type): Shows a carrier tape with a height of 0.3 ± 0.1 mm and a maximum width of 2.5 MAX. mm. - M2 (Customized): Shows a carrier tape with a hole diameter of $\varnothing 1.50^{+0.1}$ mm, hole spacing of 4.0 ± 0.1 mm, hole diameter of 2.0 ± 0.05 mm, hole offset of 1.5 ± 0.1 mm, body height of 5.65 ± 0.05 mm, total height of 12 ± 0.3 mm, body width of 5.0 mm, lead spacing of 8.0 ± 0.1 mm, lead height of 4.7 mm, and a central hole diameter of $\varnothing 1.6 \pm 0.1$ mm.</p>					


Taping Reel Dimension:

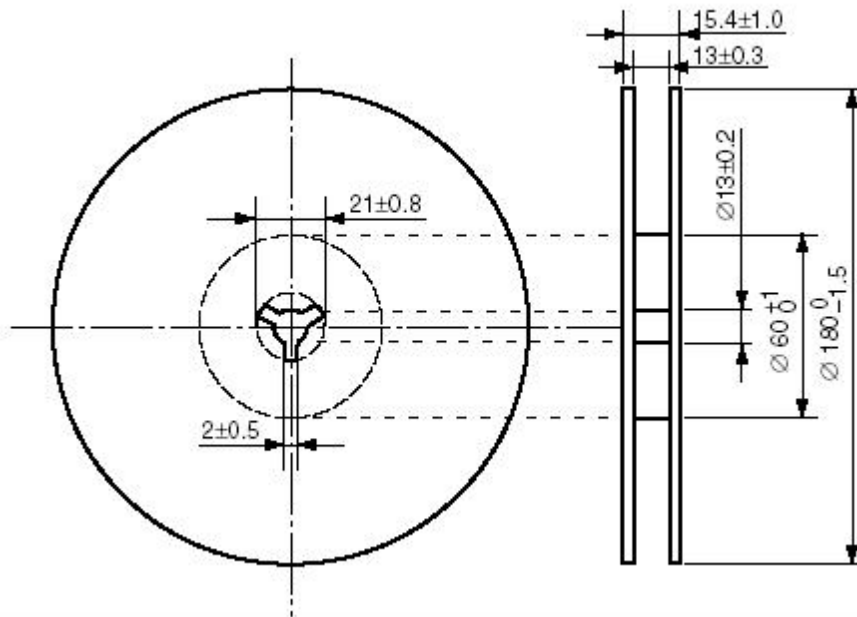


SOT-23-3:

Package	SOT-23-3	Devices per reel	3000	Unit	mm
---------	----------	------------------	------	------	----


Package dimension:

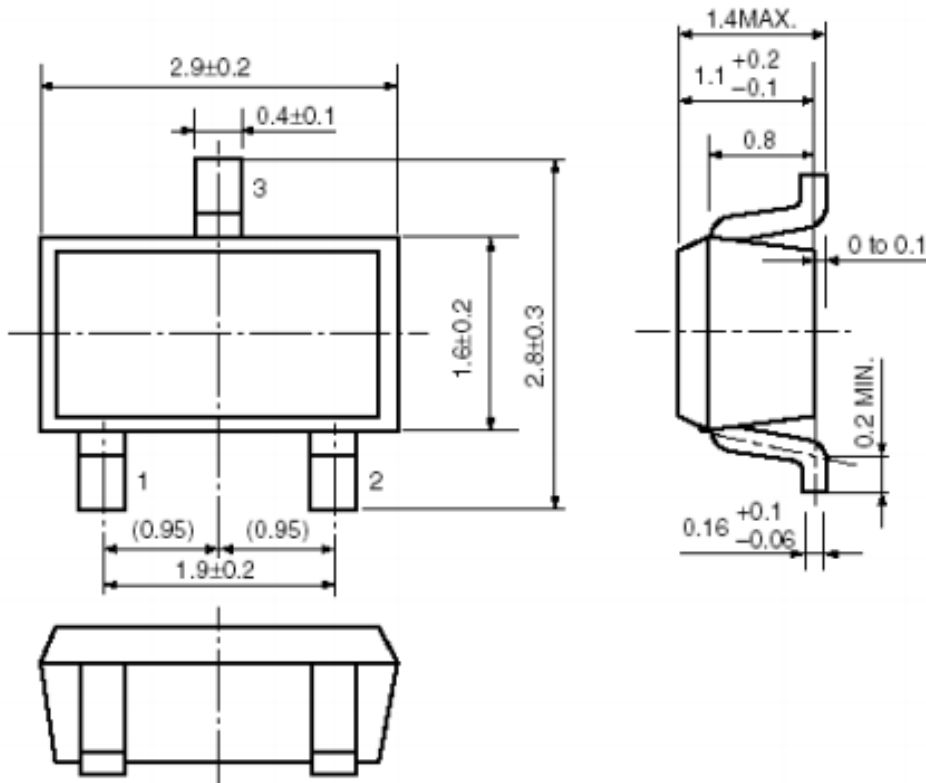

Taping Specification:

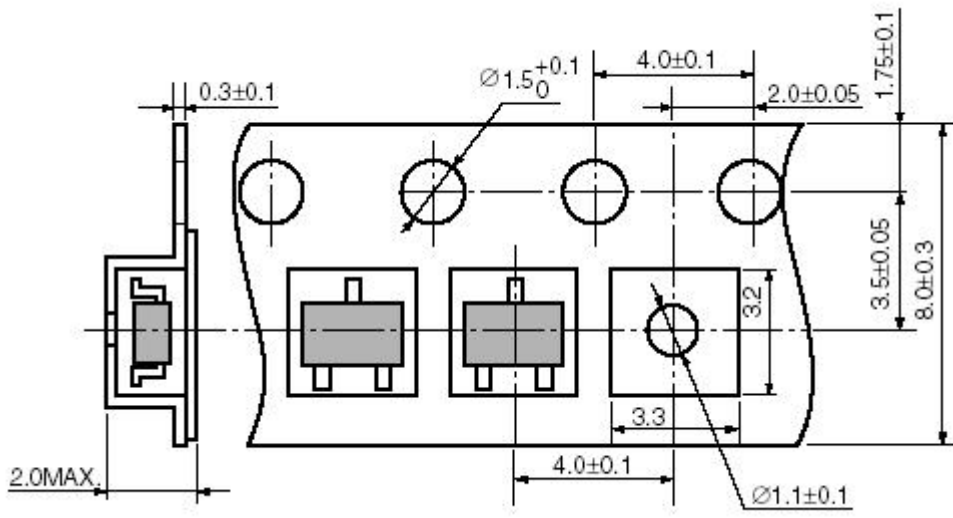

Taping reel dimension:

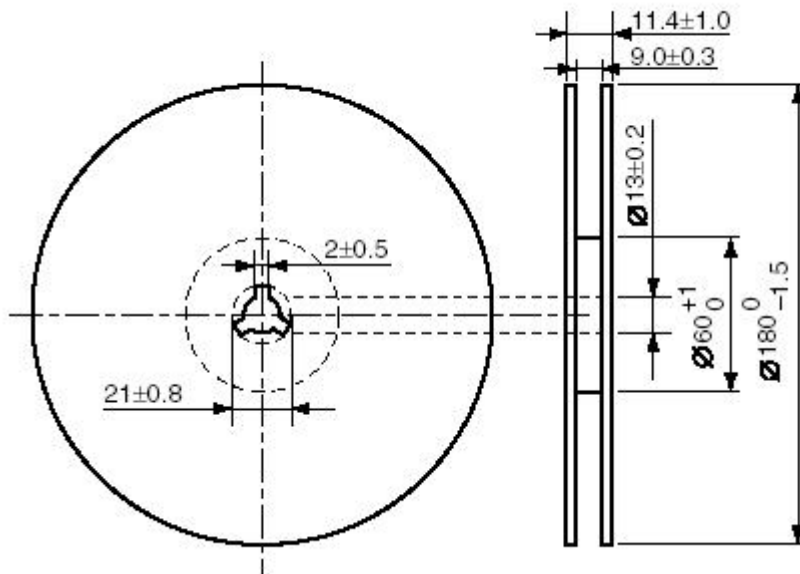

Taping reel dimension:

